


JCP SERIES CABLE PULLERS

FEATURES

- General purpose cable puller designed to lift, lower, stretch or pull heavy loads
- Double solid cast aluminum ratchet wheel brake system hold load securely in any position
- Lightweight zinc plated steel construction to resist corrosion
- Concealed spring lever control prevents accidental release
- Drop forged hooks with safety latches standard
- Snatch block included with JCP-2 and JCP-4 models
- Aircraft quality cable
- 1-ton to 4-ton capacities

STANDARDS

- This product complies with ANSI / ASME B30.21 Standards
- Load tested to 125% of capacity with certificate

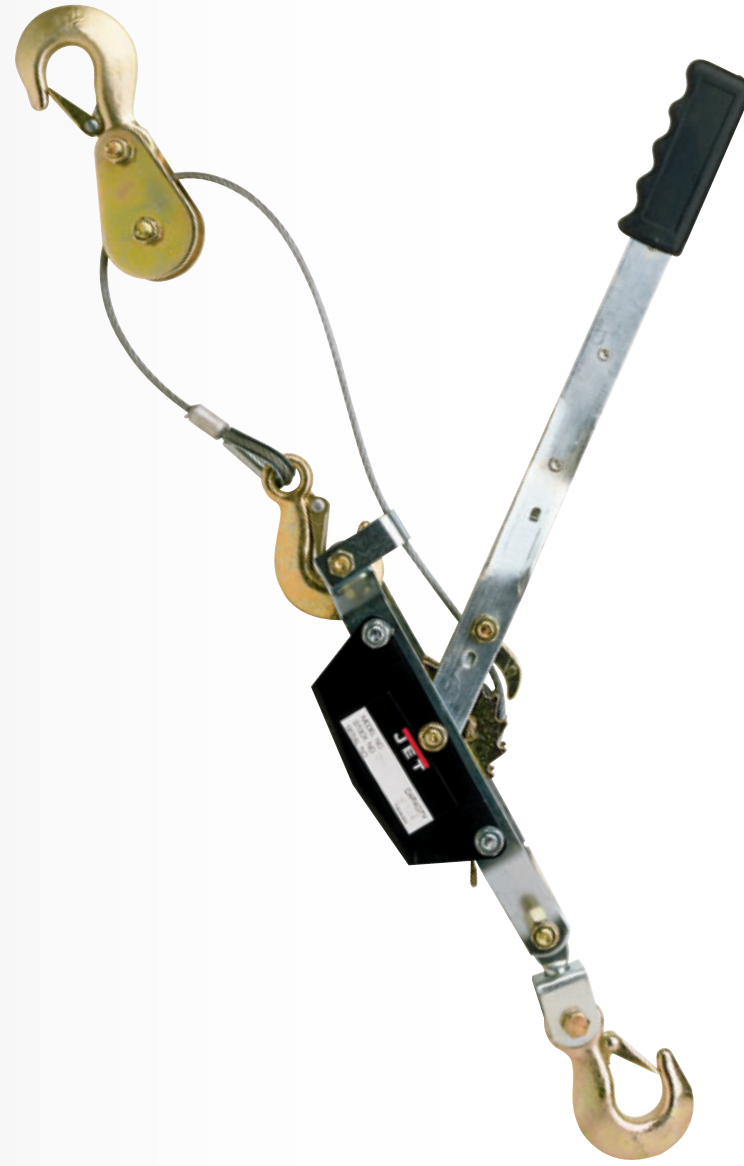

Stock# 180420 shown

STOCK NUMBER	180410	180420	180440
Model Number	JCP-1	JCP-2	JCP-4
Capacity (T)	1	2	4
Lever Ratio	18:1	36:1	36:1
Maximum Lift (ft.)	12	5	5
Lever Length (in.)	16-1/2	16-1/2	17-1/8
Minimum Distance Between Hooks (in.)	17	21	22
Wire Rope Diameter (in.)	3/16	3/16	1/4
Weight (lbs.)	7	9	13

JG SERIES GRIP PULLERS

FEATURES

- Industrial quality grip puller designed to lift, lower or pull heavy loads
- Easy to use in any direction, angle, length of pull or lift
- Multiple clutch brake system holds load in any position
- Safety shear pin in telescopic handle provides automatic overload protection
- Heavy-duty safety hooks with spring-loaded latches
- 3/4-ton to 3-ton pulling capacities
- Available with or without 66 ft. of wire rope

STANDARDS

- This product complies with ANSI / ASME B30.21 Standards



STOCK NUMBER WITH ROPE	286575K	286515K	286530K
Model Number	JG-75A	JG-150A	JG-300A
Pulling Capacity (lbs.)	2750	5500	11000
Lifting Capacity (lbs.)	1650	3300	6600
Handle Length (in.)	29-1/2	41	46-1/2
Distance Per Stroke (in.)	2-9/32	2-3/8	1-1/2
Wire Rope Diameter (in.)	5/16	7/16	5/8
Lifting Speed (fpm)	10	10	10
Overall Dimensions (L x W x H / in.)	16-3/4 x 2-1/2 x 9-1/4	21-1/2 x 3-7/8 x 11	26 x 4-1/2 x 12-3/4
Weight (lbs.)	36	48	123
STOCK NUMBER WITHOUT ROPE	286575	286515	286530

WIRE ROPE SPECIFICATIONS

STOCK NUMBER	MODEL NUMBER	DIAMETER (IN)	WEIGHT (LBS.)
286574	WR-75A	5/16	15
286514	WR-150A	7/16	28
286529	WR-300A	5/8	41

