


**Cobalt, Heavy Duty, Reduced Shank - 1/2" Shank**

\* Sets Available on pg. 241

**R56CO** Silver & Deming Drills. Self centering Split Point reduces thrust. Cobalt base material with Bronze/Steam tempered for wear resistance and lubricity. Suitable for ferrous materials.

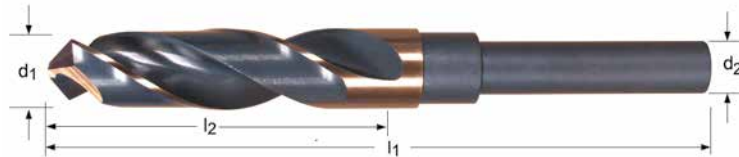

**R56CO**

ANSI

4XD

HSS-E

118°



33/64 - 1"

$d_1$ Ø Inch	$d_1$ decimal Inch	$l_2$ Inch	$l_1$ Inch	$d_2$ Ø Inch	Pack Qty	R56CO
33/64	0.5156	3"	6"	1/2	1	6000402
17/32	0.5313	3"	6"	1/2	1	6000364
35/64	0.5469	3"	6"	1/2	1	6000409
9/16	0.5625	3"	6"	1/2	1	6000007
37/64	0.5781	3"	6"	1/2	1	6000413
19/32	0.5937	3"	6"	1/2	1	6000367
39/64	0.6094	3"	6"	1/2	1	6000417
5/8	0.6250	3"	6"	1/2	1	6000439
41/64	0.6406	3"	6"	1/2	1	6000420
21/32	0.6563	3"	6"	1/2	1	6000372
43/64	0.6719	3"	6"	1/2	1	6000424
11/16	0.6875	3"	6"	1/2	1	6000350
45/64	0.7031	3"	6"	1/2	1	6000428
23/32	0.7188	3"	6"	1/2	1	6000377
47/64	0.7344	3"	6"	1/2	1	6000432
3/4	0.7500	3"	6"	1/2	1	6000394
49/64	0.7656	3"	6"	1/2	1	6000435
25/32	0.7813	3"	6"	1/2	1	6000382
51/64	0.7969	3"	6"	1/2	1	6000442
13/16	0.8125	3"	6"	1/2	1	6000353
53/64	0.8281	3"	6"	1/2	1	6000448
27/32	0.8438	3"	6"	1/2	1	6000386
55/64	0.8594	3"	6"	1/2	1	5999837
7/8	0.8750	3"	6"	1/2	1	6000004
57/64	0.8906	3"	6"	1/2	1	5999886
29/32	0.9063	3"	6"	1/2	1	6000390
59/64	0.9219	3"	6"	1/2	1	5999931
15/16	0.9375	3"	6"	1/2	1	6000356
61/64	0.9531	3"	6"	1/2	1	5999965
31/32	0.9688	3"	6"	1/2	1	6000398
63/64	0.9844	3"	6"	1/2	1	5999998
1"	1.0000	3"	6"	1/2	1	6000347