

COBALT JOBBER DRILL





Heavy Duty Jobber Length (NAS 907 Type D)

R88CO - Fractional Sizes

R89CO - Wire Gauge Sizes

Low thrust design self centering Split Point for easier penetration. Shorter Flute Lengths. Cobalt base material with Bronze tempered for wear resistance and lubricity.

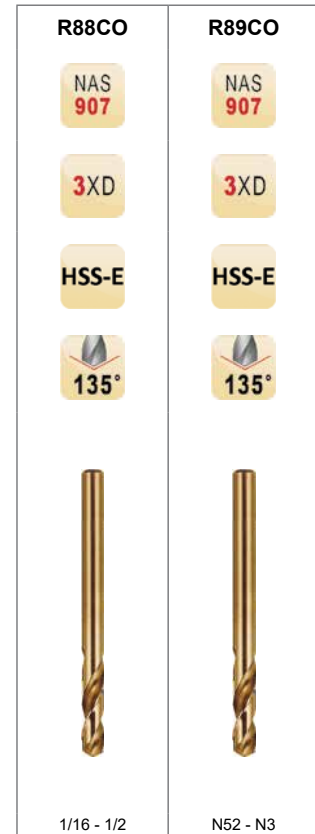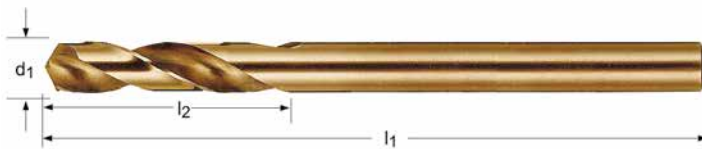

d_1 Ø Inch	d_1 Ø Nr.	d_1 decimal Inch	l_2 Inch	l_1 Inch	Pack Qty	R88CO	R89CO
1/16		0.0625	7/16	1.7/8	12	6000151	—
	52	0.0635	7/16	1.7/8	12	—	6000044
	51	0.0670	1/2	2"	12	—	6000011
	50	0.0700	1/2	2"	12	—	5999977
	49	0.0730	1/2	2"	12	—	5999855
5/64		0.0781	1/2	2"	12	5999756	—
	46	0.0810	9/16	2.1/8	12	—	5999850
	45	0.0820	9/16	2.1/8	12	—	5999846
	44	0.0860	9/16	2.1/8	12	—	5999844
	43	0.0890	5/8	2.1/4	12	—	5999839
	42	0.0935	5/8	2.1/4	12	—	5999836
3/32		0.0938	5/8	2.1/4	12	5999740	—
	41	0.0960	5/8	2.3/8	12	—	5999832
	40	0.0980	13/16	2.3/8	12	—	5999829
	39	0.0995	13/16	2.3/8	12	—	5999826
	36	0.1065	13/16	2.1/2	12	—	5999824
7/64		0.1094	13/16	2.5/8	12	5999767	—
	31	0.1200	7/8	2.3/4	12	—	5999818
1/8		0.1250	7/8	2.3/4	12	6000163	—
	30	0.1285	15/16	2.3/4	12	—	5999815
	29	0.1360	15/16	2.7/8	12	—	5999808
9/64		0.1406	15/16	2.7/8	12	5999774	—
	27	0.1440	1"	3"	12	—	5999806
	26	0.1470	1"	3"	12	—	5999803
	25	0.1495	1"	3"	12	—	5999801
	24	0.1520	1"	3.1/8	12	—	5999799
5/32		0.1563	1"	3.1/8	12	5999752	—
	22	0.1570	1.1/16	3.1/8	12	—	5999797
	21	0.1590	1.1/16	3.1/4	12	—	5999795
	20	0.1610	1.1/16	3.1/4	12	—	5999790
11/64		0.1719	1.1/16	3.1/4	12	6000176	—
	16	0.1770	1.1/8	3.3/8	12	—	5999788
	13	0.1850	1.1/8	3.1/2	12	—	5999785

d ₁ Ø Inch	d ₁ Ø Nr.	d ₁ decimal Inch	l ₂ Inch	l ₁ Inch	Pack Qty	R88CO	R89CO
3/16		0.1875	1.1/8	3.1/2	12	5999738	—
	12	0.1890	1.1/8	3.1/2	12	—	5999782
	11	0.1910	1.3/16	3.1/2	12	—	5999779
	10	0.1935	1.3/16	3.5/8	12	—	5999775
	9	0.1960	1.3/16	3.5/8	12	—	6000120
	8	0.1990	1.3/16	3.5/8	12	—	6000115
	7	0.2010	1.3/16	3.5/8	12	—	6000109
13/64		0.2031	1.3/16	3.5/8	12	5999763	—
	6	0.2040	1.1/4	3.3/4	12	—	6000073
	5	0.2055	1.1/4	3.3/4	12	—	5999863
	3	0.2130	1.1/4	3.3/4	12	—	5999812
7/32		0.2188	1.1/4	3.3/4	12	5999765	—
15/64		0.2344	1.5/16	3.7/8	12	5999821	—
1/4		0.2500	1.3/8	4"	12	6000159	—
17/64		0.2656	1.7/16	4.1/8	12	5999859	—
9/32		0.2813	1.1/2	4.1/4	12	5999771	—
19/64		0.2969	1.9/16	4.3/8	12	5999867	—
5/16		0.3125	1.5/8	4.1/2	6	5999749	—
21/64		0.3281	1.11/16	4.5/8	6	5999874	—
11/32		0.3437	1.11/16	4.3/4	6	6000167	—
23/64		0.3594	1.3/4	4.7/8	6	5999879	—
3/8		0.3750	1.13/16	5"	6	5999744	—
25/64		0.3906	1.7/8	5.1/8	6	5999883	—
13/32		0.4063	1.15/16	5.1/4	6	5999720	—
27/64		0.4219	2"	5.3/8	6	5999727	—
7/16		0.4375	2.1/16	5.1/2	6	5999762	—
29/64		0.4531	2.1/8	5.5/8	6	5999731	—
15/32		0.4687	2.1/8	5.3/4	6	5999792	—
31/64		0.4844	2.3/16	5.7/8	6	5999746	—
1/2		0.5000	2.1/4	6"	6	6000155	—